

Ecodan CAHV-Z450YA-HPB

Ultra-Low GWP R290 Air Source Heat Pump

The Mitsubishi Electric **Ecodan CAHV-Z** delivers powerful, low-carbon heating and hot water using ultra-low R290 GWP refrigerant.

Perfect for a wide range of commercial applications such as schools and hospitals, it can operate as a standalone unit or in scalable multi-unit systems. In a multi-unit setup, units cascade and rotate to meet demand, with a 7-unit system delivering up to 280kW* of efficient, reliable heating and hot water all year round.

ecodan[®] **R290**

* At nominal conditions A7W45

Key Features & Benefits:

- **Ultra-Low GWP R290 Refrigerant** - Reduces embodied carbon, helping future-proof projects and support ambitious CSR and sustainability targets
- **High-Temperature Heating Performance** - Delivers water temperatures up to 75°C, even at -15°C ambient, ensuring reliable comfort in demanding conditions
- **Scalable Cascade Control** - Multiple units can be combined and managed in cascade, providing maximum design freedom for a wide range of applications
- **Wide Water Temperature Range Without Boost Heaters** - Supplies 24°C -75°C flow temperatures without electric boosters, reducing energy consumption, running costs, and system complexity
- **Rapid Defrost Operation** - Minimises system downtime during defrost, helping maintain consistent heating performance in cold conditions
- **Integrated R290 Safety Features** - Built-in leak detection and an explosion-proof relay support safe, compliant operation alongside peace of mind
- **Quiet, Adaptable Operation** - Low Noise Mode that minimises sound levels, and External Static Pressure Control allows flexible system design
- **Anti-Simultaneous Defrost Control** - Prevents full system shutdown during defrost cycles, ensuring continuous heating delivery



R290



MODEL			CAHV-Z450YA-HPB(-BS)
POWER SOURCE			3-phase 4-wire 380-400-415v, 50/60Hz
CAPACITY(EN14511) ^{*1}			40
CAPACITY ^{*2}	Power input	kW	12.62
	Current input	A	21.3-20.2-19.5
	COP (kW/kW)		3.17
	SCOP Low/Medium		4.12 / 3.25
	Water Flow Rate	m ³ /h	6.88
		kW	37.5
MAXIMUM CURRENT INPUT	Power input	kW	18.39
	Current input	A	31.1-29.5-28.4
	COP (kW/kW)		2.04
WATER PRESSURE DROP ^{*3}			45.6
TEMPERATURE RANGE ^{*4}	Outlet water temperature	kPa (psi)	10.2 (1.47)
	Outdoor temperature	°C	24 ~ 75
CIRCULATING WATER VOLUME RANGE ^{*5}		°C	-25 ~ 43
		m ³ /h	4.0 ~ 7.0
SOUND PRESSURE LEVEL (Measured 1m below the unit in an anechoic room) ^{*1*6}			65
SOUND PRESSURE LEVEL (Measured 1m below the unit in an anechoic room) ^{*6*7}			72
WATER PIPE DIAMETER AND TYPE	Inlet	mm (in)	40A, Rc 1-1/2B
	Outlet	mm (in)	40A, Rc 1-1/2B
EXTERNAL FINISH			Acrylic painted steel sheet <Munsell 5Y 8/1 or similar>
EXTERNAL DIMENSIONS (Width x Depth x Height)			1750 × 740 x 1710
NET WEIGHT			363
DESIGN PRESSURE	R290	MPa	3.85
	Water	MPa	1.0
HEAT EXCHANGER	Water-side		Copper brazed stainless steel sheet
	Air-side		Plate fins and copper tubes
COMPRESSOR	Type		Inverter scroll hermetic compressor
	Manufacturer		Mitsubishi Electric Corporation
	Starting method		Inverter
	Motor output	kW	10.8
	Lubricant		PZ46M
FAN	Air flow rate	L/s	2500 × 2
	External static pressure / External static pressure mode		10 Pa (1 mm H2O) / 40 Pa (4 mm H2O)
	Type and quantity		Propeller fan × 2
	Control and driving mechanism		Inverter control, direct driven by motor
	Motor output	kW	0.92 × 2
HIC (Heat Inter-Changer) CIRCUIT			Copper pipe
PROTECTION DEVICES	High pressure		High-pressure sensor and switch set at 3.85 MPa
	Inverter circuit		Overheat and overcurrent protection
	Compressor		Overheat protection
	Fan motor		Thermal switch
DEFROSTING METHOD			Auto-defrost mode (Reversed refrigerant cycle)
REFRIGERANT	Type and factory charge	kg	R290, 4.8 kg
	Flow and temperature control		LEV and HIC circuit


Notes:

^{*1} Under normal heating conditions at the outdoor temperature of 7°CDB/6°CWB, the outlet water temperature of 45°C, and the inlet water temperature of 40°C.

^{*2} Under normal heating conditions at the outdoor temperature of -5°CDB/-6°CWB and the outlet water temperature of 55°C.

^{*3} Under normal heating conditions at the outdoor temperature of 7°CDB/6°CWB through the dry NC-contact.

^{*4}

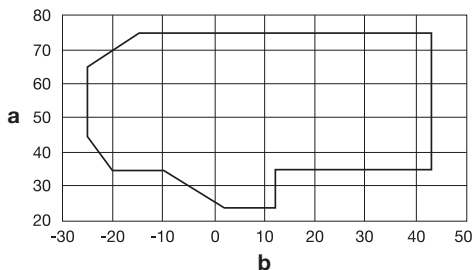

a: Outlet water temp. (°C)

b: Outdoor temp. (°C)

Keep inlet water temp. of 19°C or higher during the unit operation.


^{*5} The unit can operate at the water volume range of 1.5 - 4.0m³/h if the water volume exceeds 4.0m³/h during defrost cycle. The defrost signal is output from the terminal block of the unit.

^{*6} SPL is the value measured in an anechoic room at 1m away from the unit and 1.5m above the floor.


^{*7} Under conditions with maximum compressor frequency and fan rotated speed.

R290

CAHV-Z450YA-HPB(-BS) DIMENSIONS

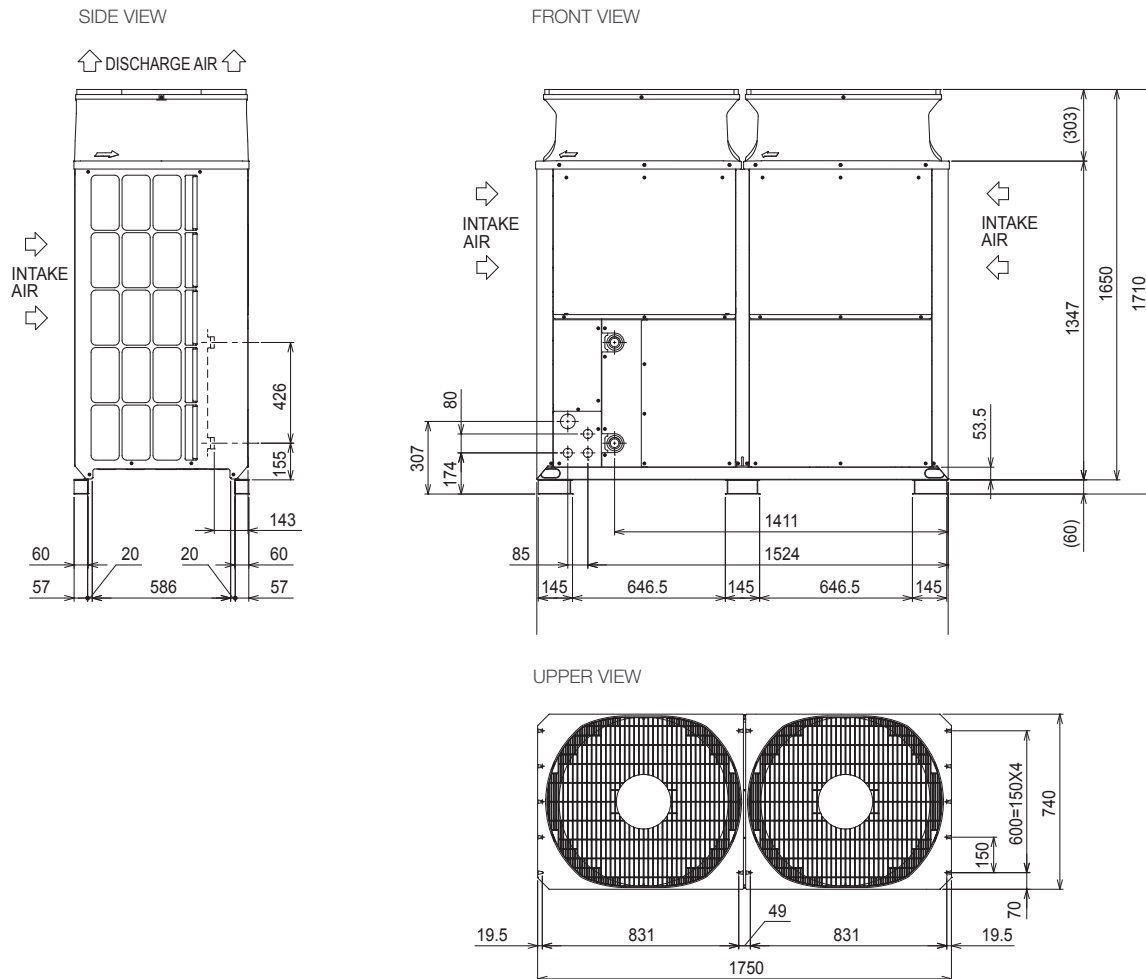

Telephone: +353 1 4198800
email: sales.info@meir.mee.com
les.mitsubishielectric.ie



UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880
IRELAND Mitsubishi Electric Europe, Plunkett House, Grange Castle Business Park, Nangor Road, Dublin 22, Ireland.

Country of origin: United Kingdom - Italy - Turkey - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2026. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only and please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R515B (GWP:292), R454C (GWP:148), R1234ze (GWP:7) or R1234yf (GWP:4). *These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a hydrocarbon, R290 (GWP:0.02). *These GWP values are based on IPCC 6th edition.

Effective as of January 2026

