

Y Series Standard Efficiency Heat Pump Outdoor Unit (67-95kW)



The **City Multi Y Series VRF Heat Pump systems** provide a simple and flexible solution where heating or cooling is required across all or selected indoor units at any given time.

With a modular outdoor unit design, the system offers complete design freedom and is well suited to applications such as open-plan offices, call centres, and retail spaces.



Key Features & Benefits:

- **Energy Efficient Heat Pump Operation** - Delivers effective heating or cooling to internal spaces, supporting a simple and flexible system design
- **Lower GWP R32 Refrigerant** - for reduced carbon impact and future-ready legislation compliance
- **Ultra-Compact Modular Design** - Smaller unit footprint allows installation in tight spaces without compromising on performance
- **Broad Indoor Unit Compatibility** - Connects to a wide range of unit types and capacities, making it suitable for varied building applications
- **Extended Heating Range (-25°C)** - Ensures reliable heating even in severe winter conditions by maintaining efficient system operation
- **Easy-to-Maintain Safety Feature Options** - For reduced onsite time and costs while supporting occupant peace of mind
- **Low Noise Operation** - Features a 5-step low noise mode that minimises sound levels for quieter surroundings
- **113m Vertical Height Separation** - Offers generous height allowance between indoor and outdoor units, enabling design flexibility in larger buildings




R32




PUHY-M-YSXM-A OUTDOOR UNITS		PUHY-M600YSXM-A	PUHY-M650YSXM-A	PUHY-M700YSXM-A	PUHY-M750YSXM-A	PUHY-M800YSXM-A	PUHY-M850YSXM-A
CAPACITY (kW)	Heating (Max)	75.0	82.5	90.0	95.0	100.0	106.0
	Cooling (nominal)	67.0	73.5	80.0	85.0	90.0	95.0
	High Performance Heating (UK)	TBC	TBC	TBC	TBC	TBC	TBC
	COP Priority Heating (UK)	TBC	TBC	TBC	TBC	TBC	TBC
	Cooling (UK)	TBC	TBC	TBC	TBC	TBC	TBC
POWER INPUT (kW)	Heating (Max)	18.98	21.94	25.21	26.53	27.93	30.54
	Cooling (nominal)	19.30	21.68	23.52	25.22	26.94	28.87
	High Performance Heating (UK)	TBC	TBC	TBC	TBC	TBC	TBC
	COP Priority Heating (UK)	TBC	TBC	TBC	TBC	TBC	TBC
	Cooling (UK)	TBC	TBC	TBC	TBC	TBC	TBC
COP / EER (Max/Nominal)		3.95 / 3.47	3.76 / 3.39	3.57 / 3.40	3.58 / 3.37	3.58 / 3.34	3.47 / 3.29
SCOP / SEER		4.76 / 7.54	4.76 / 7.63	4.76 / 7.85	4.67 / 7.65	4.59 / 7.46	4.52 / 7.43
MAX NO. OF CONNECTABLE INDOOR UNITS		43	46	50	50	50	50
MAX CONNECTABLE CAPACITY		50~130% OU Capacity	50~130% OU Capacity	50~130% OU Capacity	50~130% OU Capacity	50~130% OU Capacity	50~130% OU Capacity
AIRFLOW (m³/min)	High	235 / 235	220 / 235	220 / 220	260 / 220	260 / 260	300 / 260
	Gas	28.58 (1-1/8")	28.58 (1-1/8")	34.93 (1-3/8")	34.93 (1-3/8")	34.93 (1-3/8")	41.28 (1-5/8")
PIPE SIZE mm (in)	Liquid	15.88 (5/8")	15.88 (5/8")	19.05 (3/4")	19.05 (3/4")	19.05 (3/4")	19.05 (3/4")
	Gas	15.88 (5/8")	15.88 (5/8")	19.05 (3/4")	19.05 (3/4")	19.05 (3/4")	19.05 (3/4")
SOUND PRESSURE LEVEL (dBA)		67.0 / 64.0	67.0 / 63.0	67.0 / 61.0	67.0 / 63.0	68.0 / 65.0	70.0 / 66.0
SOUND POWER LEVEL (dBA)		87.0 / 84.0	86.0 / 83.0	86.0 / 82.0	88.0 / 84.0	90.0 / 86.0	91.0 / 86.0
WEIGHT (kg)		263 + 263	319 + 263	319 + 319	324 + 319	324 + 324	324 + 324
DIMENSIONS (mm)	Width	910 + 910	910 + 1207	1207 + 1207	1207 + 1207	1207 + 1207	1207 + 1207
	Depth	740	740	740	740	740	740
	Height	1858	1858	1858	1858	1858	1858
(1798mm without legs)							
ELECTRICAL SUPPLY¹		380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz
PHASE¹		Three	Three	Three	Three	Three	Three
STARTING CURRENT (A)¹		TBC	TBC	TBC	TBC	TBC	TBC
NOMINAL SYSTEM RUNNING CURRENT (A)¹	Heating / Cooling [MAX]	30.4 / 30.9 [TBC]	35.1 / 34.7 [TBC]	40.4 / 37.7 [TBC]	42.5 / 40.4 [TBC]	44.7 / 43.2 [TBC]	48.9 / 46.3 [TBC]
	Heating / Cooling	-25~15.5 / -5~52	-25~15.5 / -5~52	-25~15.5 / -5~52	-25~15.5 / -5~52	-25~15.5 / -5~52	-25~15.5 / -5~52
GUARANTEED OPERATING RANGE (°C)		TBC	TBC	TBC	TBC	TBC	TBC
FUSE RATING (MCB sizes BS EN 60947-2) - (A)¹		TBC	TBC	TBC	TBC	TBC	TBC
MAINS CABLE No. Cores¹		4 + earth / 4 + earth	4 + earth / 4 + earth	4 + earth / 4 + earth	4 + earth / 4 + earth	4 + earth / 4 + earth	4 + earth / 4 + earth
CHARGE REFRIGERANT (kg) / CO₂ EQUIVALENT (t) R32 (GWP 675)		16.0 / 10.8	17.3 / 11.7	18.6 / 12.6	18.6 / 12.6	18.6 / 12.6	18.6 / 12.6
MAX ADDITIONAL REFRIGERANT (kg) / CO₂ EQUIVALENT (t) R32 (GWP 675)		53.0 / 35.8	53.0 / 35.8	53.5 / 36.2	53.5 / 36.2	53.7 / 36.3	54.0 / 36.5

Notes: ErP Lot 6 calculation method to EN14825. *1 A separate power supply is required for each module. Where more than one figure is quoted there are multiple modules.


PUHY-M600YSXM-A DIMENSIONS

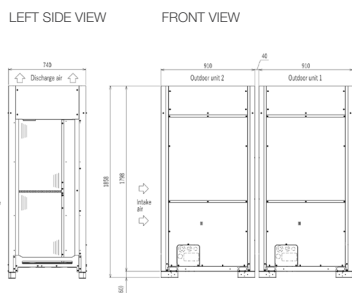

PUHY-M650YSXM-A DIMENSIONS

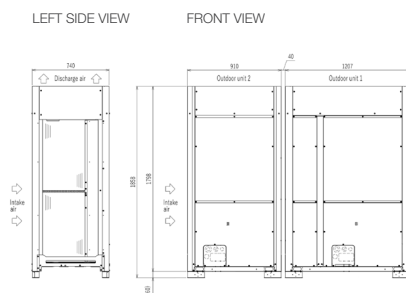

PUHY-M700/750/800/850YSXM-A DIMENSIONS

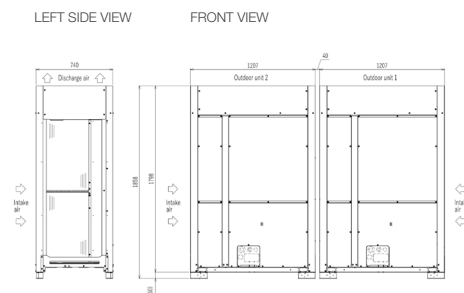

Telephone: +353 1 419 8800
email: sales.info@meir.mee.com
les.mitsubishielectric.ie



IRELAND Mitsubishi Electric Europe, Plunkett House, Grange Castle Business Park, Nangor Road, Dublin 22, D22 YRK4 Ireland. Telephone: (00353) 1 4198800 Email: sales.info@meir.mee.com
Web: les.mitsubishielectric.ie

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880

Country of origin: United Kingdom - Italy - Turkey - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2025. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only and please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R515B (GWP:292), R454C (GWP:148), R1234ze (GWP:7) or R1234yf (GWP:4). *These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a hydrocarbon, R290 (GWP:0.02). *These GWP values are based on IPCC 6th edition.

Effective as of February 2025

